320 B standard anthracite

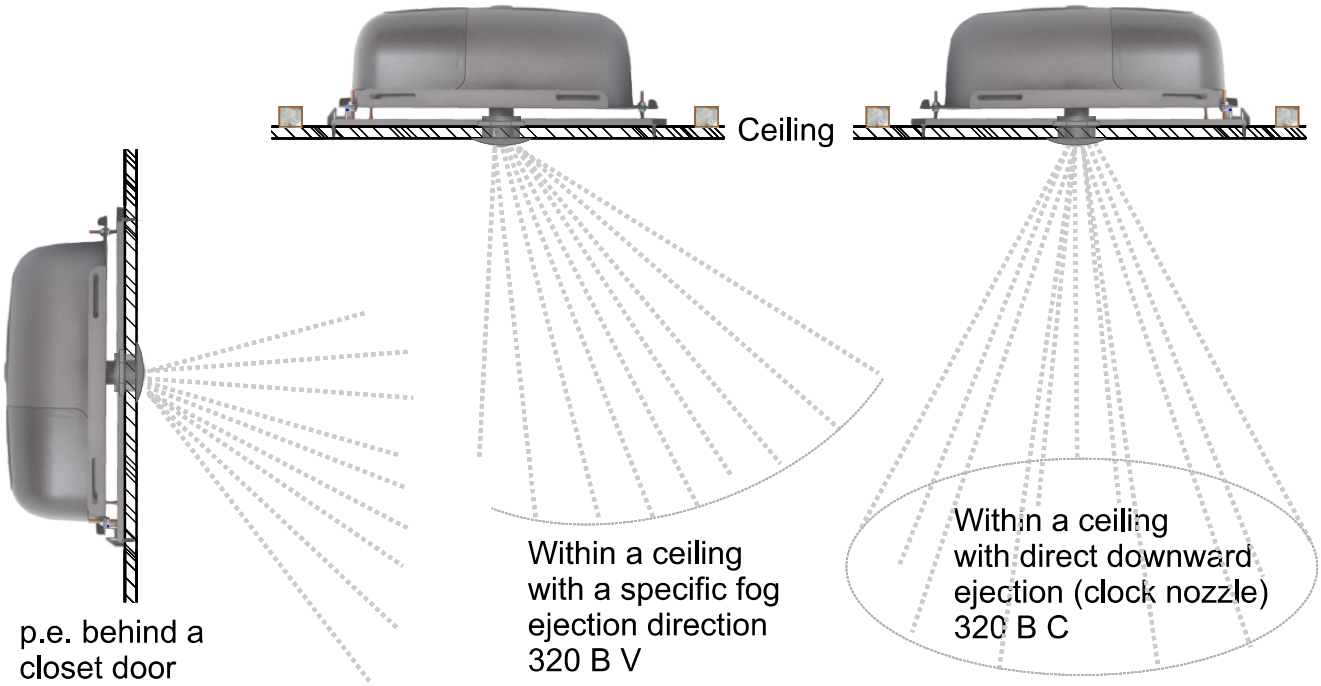

Cable guide hole for
230 VAC cable
min. 0.75 mm²
Cable guide hole for
communication cable
controller / connector
M6 screw to adjust
the depth
Tool sw. 13.
450 mm
Unit backplate
Pannel fixation plate
Rosette
Ejection nozzle
Fixation screw
220 mm
approximately 170 mm
Pannel thickness
between 10 and 28 mm.