

The Bentley Building
Dickinson Street
Oldham
Lancashire
OL4 1HD

TEL. 0161 627 5256
FAX. 0161 620 6995

sales@interfacesolutions.uk.com



**INTERFACE
SOLUTIONS
UK LTD.**

www.interfacesolutions.uk.com



(IS M12T)
12 VOLT MINI TRANSISTORISED RELAY

This is the transistorised miniature version of the IS 12. It is a double pole relay complete with LED indication. It has been designed to allow low current, low voltage signalling outputs from control equipment to activate the relay without overloading the signalling circuits. The trigger voltage may be negative or positive and between 5 and 15 Volts with an approximate current drain of 4 mA. The trigger polarity is selected by a plug in link.

It is supplied as an individual unit or in strips of 4 modules.

Supply Voltage	12 Volts DC
Trigger Voltage	5V – 15V
Trigger Current	4 mA
Nominal Current	60 mA
Coil Resistance	285 Ohms
Double Pole Relay rated at	2 Amps at 30 V DC minimum 10 mA
Dimensions	Single: 37m (W) 37mm (L) 16mm (H) Strip of 4: 37m (W) 150mm (L) 16mm (H)
Packing Weight	Single: 24g Strip of 4: 74g

We recommend IS Sticky Feet Size A, self-adhesive mounting pillars to ensure a neat fixing.

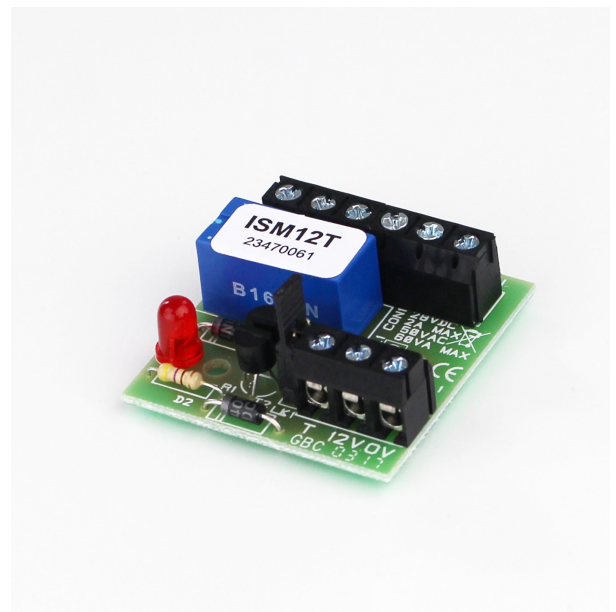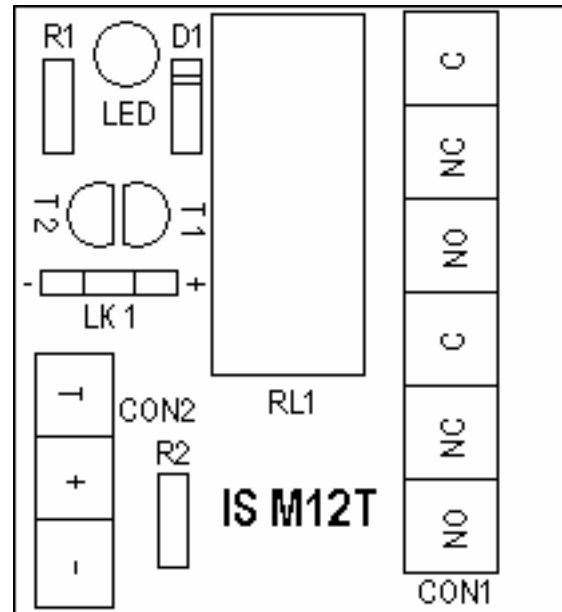

This product has passed the requirements for compliance